


CABLES

POLYCAB

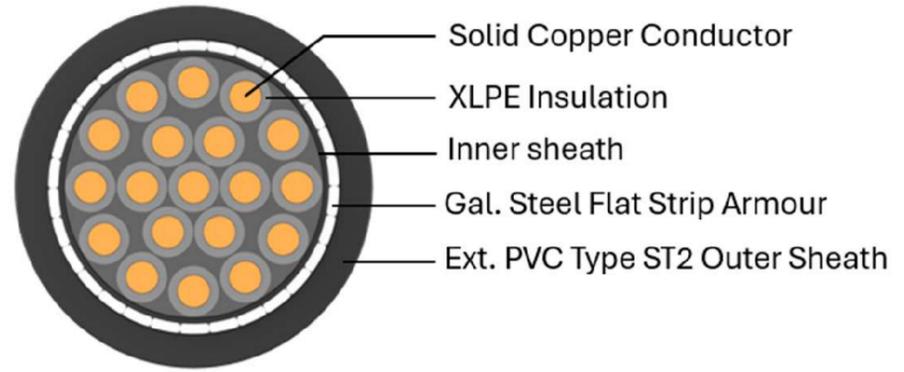

LT XLPE CABLE

TDS Doc.No:PIL/TE/250425/002855

DESIGN CODE: LVIS09CXSFY2019C2.5SA004S

Particulars	19 Core X 2.5 Sq.mm
Name of Manufacturer	Polycab India Ltd
Type of cable	2XFY
Voltage Grade V	1100
No of cores X size in sqmm	19 Core X 2.5 Sq.mm
Conductor	
a) Material	Plain annealed Copper as per Class 1 of IS:8130/2013
b) Max. D.C. resistance of conductor at 20° C (ohm/km)	7.41
c) Shape of the conductor	Solid Circular
Insulation	
a) Material	XLPE as per IS 7098(Pt-1)/88, Latest
b) Nominal thickness (mm)	0.7
c) Core identification	All cores Grey with number printing
Inner Sheath	
a) Material	Wrapping of Tapes
b) Minimum thickness (mm)	0.3
Armouring	
a) Material	Galvanised Steel
b) Type of armouring	Flat Strip
c) Nominal size of armour (mm)	4.0 x 0.8
d) Tolerance on armour dimensions	+/-10%
Outer Sheath	
a) Material	Extruded PVC Type ST2 as per IS:5831/84
b) Thickness (mm)	1.40 (Min.)
c) Colour of outer sheath.	Black
Electrical Parameters	
a) Max. a.c. resistance of conductor at 90° C (ohm/km)	9.45
b) Calculated Cable reactance (ohm/km)	0.0983
c) Impedance of cable (ohm/km)	9.45
d) Approx. Cable Capacitance (mfd/km)	0.19

Format ID: TE/QMS/F/07, R-00, Date: 16/03/2025

CABLES

POLYCAB

Maximum conductor temperature under normal operating conditions	90°C
Maximum conductor temperature at the termination of short circuit	250°C
Short Circuit rating of conductor for the duration of 1 sec (kA)	0.36
Continuous Current carrying capacities :-	
a) In Ground at 30°C (A)	18
b) In Air at 40°C (A)	16
Applicable Standard	IS 8130/2013,IS 7098 Part I/88, IS 5831/84, IS 3975/1999 etc. with latest up to date amendments
Approx. overall diameter of the cable in mm	21.0 ± 2
Minimum bending radius	12 times Overall diameter
Max. Tensile strength	
i) for Cables pulled with stocking (Newtons)	9 x D ² , D is the cable OD in mm
ii) for Cables pulled with pulling eyes (N)	2,375
Embossing Printing	POLYCAB ELECTRIC 1100 VOLTS GRADE XLPE YEAR POLYCAB ELECTRIC 1100 VOLTS GRADE XLPE CABLE SIZE CABLE TYPE WITH SEQUENTIAL MARKING at every one meter interval.
Standard Drum Length (Mtr.)	1000 ± 5%
Non- Standard Drum Length (Mtr.)	Maximum 5% of order quantity

Rev. No.: 00

Issued Date:25/04/2025

Note:-The values given above are subject to tolerances as per the relevant standards
www.polycab.com | Toll Free No - 1800 267 0008 | Email: enquiry@polycab.com