


CABLES

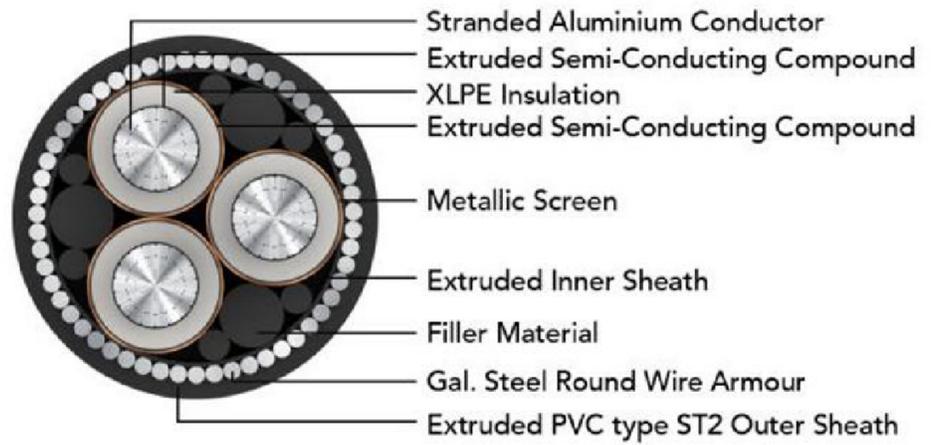

HT XLPE CABLE

TDS Doc.No:PIL/TE/250425/001965

DESIGN CODE : MVIS11AXSWY2003C095SA001S

Particulars	3C X 95 Sqmm
Name of Manufacturer	Polycab India Ltd
Type of Cable	A2XWY
Voltage Grade kV	11/11
No of cores X size in sqmm	3 X 95
Maximum conductor temperature under normal operating conditions	90°C
Maximum conductor temperature at the termination of short circuit	250°C
a) Permissible Voltage Variation	± 10%
b) Permissible Frequency Variation	± 5%
c) Combined Voltage & Frequency variation	± 10%
Conductor	
a) Material	H4 Grade Aluminium as per Class 2 of IS: 8130/2013, latest
b) Maximum d.c. resistance of conductor at 20° C (ohm/km)	0.32
c) Shape	Stranded Compacted Circular
Conductor Screening	
a) Material	Extruded Semi-conducting Compound
b) Nominal thickness (mm)	0.3
Insulation	
a) Material	XLPE as per IS 7098(Pt-2)/2011
b) Nominal thickness (mm)	5.5
c) Core identification	By Coloured strips(Red,Yellow,Blue)
Insulation Screening	
Non - Metallic	
a) Material	Extruded Semi-conducting Compound
b) Nominal thickness (mm)	0.3
Metallic	
a) Material	Single Layer of Copper Tape
b) Approximate thickness (mm)	0.03
c) Earth fault Current withstand capacity of Cu Tape kA for 1 sec	0.46 kA for 1 Sec, 3 Core Combined

Inner Sheath	
a) Material	Extruded PVC Type 'ST2' as per IS:5831, latest
b) Minimum thickness (mm)	0.6
Armouring	
a) Material	Gal.Steel
b) Type of armouring	Round Wire
c) Nominal size of armour (mm)	3.15
d) Tolerance on armour dimensions	± 0.080 mm
Outer Sheath	
a) Material	Extruded PVC Type 'ST2' as per IS:5831, latest
b) Thickness (mm)	2.52 (Min.)
c) Colour of sheath	Black
Electrical Parameters	
a) Max. a.c. resistance of conductor at 90° C (ohm/km)	0.411
b) Approx. Cable Capacitance (mfd/km)	0.2
c) Approx. Cable reactance (ohm/km)	0.112
d) Impedance of cable (ohm/km)	0.426
Continuous Current carrying capacities :-	
a) In Ground at 30°C (A)	190
b) In Air at 40°C (A)	222
Short Circuit rating of conductor for the duration of 1 sec (kA)	8.98
Standard to which the cables confirm	IS 7098 Part 2/2011, IS 8130, IS 5831, IS 3975 etc. with latest up to date amendments
Approx. Overall diameter (mm)	67.0 ± 3.0
Embossing	YEAR POLYCAB ELECTRIC 11/11 KV (UE) GRADE XLPE
Printing	YEAR POLYCAB ELECTRIC 11/11 KV (UE) GRADE XLPE , CABLE SIZE, CABLE TYPE WITH SEQUENTIAL MARKING at every one meter interval.